



ETA® International Common Formulas

For use on all Basic Electronics Exams – Associate CET (CETa), Basic Systems Technician (BST), Electronics Modules (EM1-5), Student Electronics Technician (SET) as well as the General Communications Technician-Level 1 (GCT1) Exam

Conversion Factors

π (Pi) = 3.14	1 meter = 3.28 feet
2π = 6.28	1 inch = 2.54 centimeters
$\log\pi$ = 0.497	1 radian = 57.3°

Resonant Frequency Formulas

f (kHz), L (Microhenries), C (Microfarads)

$$f_{\text{kHz}} = 159.2 / \sqrt{LC}$$

f (Hz), L (Henries), C (Farads)

$$f_{\text{resonant}} = \frac{1}{2\pi\sqrt{LC}}$$

Frequency & Wavelength Formulas

f = frequency, λ = wavelength

$0.5\lambda = 180^\circ$ = half wave and $0.25\lambda = 90^\circ$ = quarter wave


$$f_{\text{Hz}} = (3 \times 10^8) / \lambda_{\text{meters}} \quad \text{or} \quad f_{\text{MHz}} = 984 / \lambda_{\text{feet}}$$

$$\lambda_{\text{meters}} = (3 \times 10^8) / f_{\text{Hz}} \quad \text{or} \quad \lambda_{\text{feet}} = 984 / f_{\text{MHz}}$$

$c = f \times \lambda$ where c is the speed of light

Sine Wave Conversion

- Effective value (RMS) = $0.707 \times \text{Peak Value} = 1.11 \times \text{Average Value}$
- Peak Value = $1.414 \times \text{Effective Value (RMS)} = 1.57 \times \text{Average Value}$
- Average Value over positive half period = $0.637 \times \text{Peak Value} = 0.9 \times \text{Effective Value (RMS)}$
- Identify: Waveform, Peak (amplitude), RMS, 1 cycle over time period (frequency), Peak to peak, and practical average

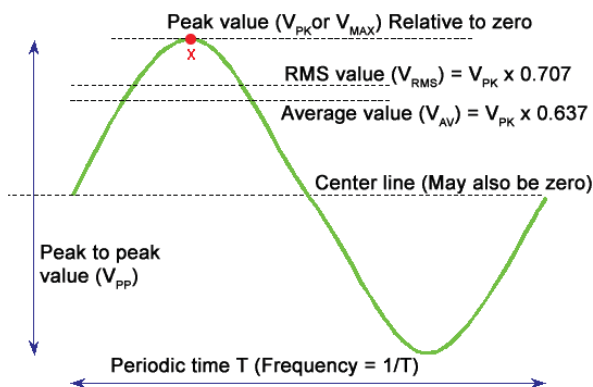

Voltage Gain In Decibels

$$\text{Gain dB} = 20 \log_{10} (V_{\text{out}} / V_{\text{in}})$$

Inverting Op-Amp

$$\text{Gain } (A_v) = (V_{\text{OUT}} / V_{\text{IN}}) = - (R_f / R_i)$$

Resistors In Series

$$R = R_1 + R_2 + R_3 \dots$$

Inductors Connected In Series

$$L = L_1 + L_2 + L_3 \dots$$

Capacitors Connected In Parallel

$$C = C_1 + C_2 + C_3 + \dots$$

Impedance For A Series Circuit

where Z is impedance

$$Z = \sqrt{R^2 + (X_L - X_C)^2}$$

Ratio Of 2 Power Levels In Decibels

$$\text{Gain dB} = 10 \log_{10} (P_2 / P_1)$$

Non-Inverting Op-Amp

$$\text{Gain } (A_v) = (V_{\text{OUT}} / V_{\text{IN}}) = 1 + (R_f / R_i)$$

Resistors In Parallel

$$1 / R = (1 / R_1) + (1 / R_2) + (1 / R_3) \dots$$

Inductors Connected In Parallel

$$1 / L = (1 / L_1) + (1 / L_2) + (1 / L_3) \dots$$


Capacitors Connected In Series

$$1 / C = (1 / C_1) + (1 / C_2) + (1 / C_3) + \dots$$

Impedance For R And X In Parallel

$$Z = \frac{RX}{\sqrt{R^2 + X^2}}$$

Ohm's Law

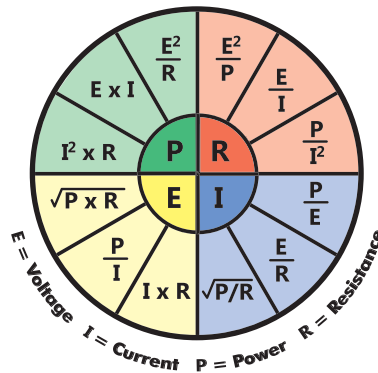

Resistor Color Code Chart - '# Band

Color	Digit Value	Decimal Multiplier	Tolerance	Temp. Coeff.
Black	0	1 Ω		250
Brown	1	10 Ω	$\pm 1\%$	100
Red	2	100 Ω	$\pm 2\%$	50
Orange	3	1 k Ω		15
Yellow	4	10 k Ω		25
Green	5	100 k Ω	$\pm 0.5\%$	20
Blue	6	1 M Ω	$\pm 0.25\%$	10
Violet	7	10 M Ω	$\pm 0.10\%$	5
Gray	8	100 M Ω	$\pm 0.05\%$	1
White	9	1 G Ω		
Gold		0.1 Ω	$\pm 5\%$	
Silver		0.01 Ω	$\pm 10\%$	
No Color			$\pm 20\%$	(ppm)

PEMDAS Rule

Parentheses, Exponents, Multiplication, Division, Add, Subtract

Time Constants

T (Greek Tau), R (ohms), C (Farads), L (Henries)

RL circuit: $1 T$ (sec) = $L(H) / R(\Omega)$

RC circuit: $1 T$ (sec) = $R(\Omega) \times C(F)$

Compute Charge Or Quantity of Electricity & Energy Storage In A Capacitor

Q (Coulombs), W (Joules), C (Farads), V (Volts)

$$Q = C \times V \quad W = \frac{1}{2} C \times V^2$$

Capacitor Current Equations (storing energy in electric field)

I (Amps), Q and C and V (as above), d {delta Δ } (Change), t (Time)

$$I = C(dV / dt) \quad \text{from } C \cdot dV = dQ \quad \text{and } I = dQ / dt$$

Inductor Voltage Equations

L (Henries), d , i , t , V , and W (as above)

$$V = L(di / dt) \quad W = \frac{1}{2} L \times I^2$$

Reactance Of Inductors

Reactance Of Capacitors

X_L & X_C (Reactance), C and L (as above), f (Frequency)

$$X_L = 2\pi \times f \times L$$

$$X_C = 1 / (2\pi \times f \times C)$$

Battery Internal Resistance

$$V_{\text{out}} = \text{EMF} - (R_{\text{int}} \times I_{\text{out}})$$

International System of Units (SI)

Prefix	Symbol	Multiplier	Power of Ten
Terra	T	trillion	10^{12}
Giga	G	billion	10^9
Mega	M	million	10^6
kilo	k	thousand	10^3
none	none	1	10^0
milli	m	1/thousandth	10^{-3}
micro	μ	1/millionth	10^{-6}
nano	n	1/billionth	10^{-9}
pico	p	1/trillionth	10^{-12}